
ESPACE 8,00 and 9,60

Benefit from the maximum reliability of a large plastic greenhouse

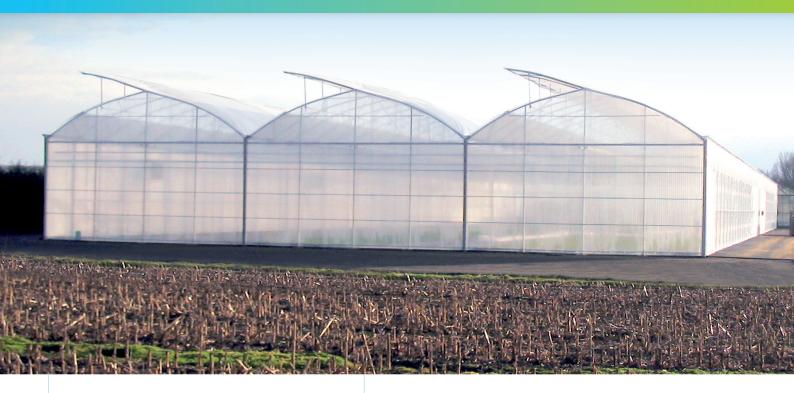

Climate control

The volume and height

of this greenhouse developed by BN greenhouses - CMF Group provides the necessary control for the proper development of your crops.



3.20m opening

Controlled aeration

Perfectly sealed

In a perfect seal in the closed position, the 9.60 space and the 8.00 Espace allows you to better manage your ventilation through a roof opening ridge with geometry and positioning to initiate the ventilation and dehumidification cycle immediately upon opening.

You will benefit from technical characteristics mastered by one of the greenhouse industry leaders. That's for certain!



4.25m opening (50%) on the 8.00 version



ESPACE 8,00 and 9,60

Benefit from t	the maximum	reliability
of a large plastic	greenhouse	

DIMENSIONS		
Width (W)	8,00m	9,60m
Maximum mesh	2,50m	2,50m
Maximum row	5,00m	5,00m
Height to roof (F)	5,40 / 5,90 / 6,40m	5,60 / 6,10 / 6,60m
Height below gutter (Hsc)	3,5 / 4 / 4,5m	3,5 / 4 / 4,5m
Height below cultivation platform	3.35 / 3.85 / 4.35m	3.35 / 3.85 / 4.35m

Espace 8.00m

ROOFING

MODELS


Single wall	Yes
Double inflated wall	Yes
Semi-rigid	Yes


AERATION

Main slope hinge	By rolling/Main slope hinge of	By rolling/Main slope hinge opening/Guillotine opening	
Pinion hinge	By rollin	By rolling	
Sur toiture	3.20m or 4.25m opening	3.20 m opening	
	hinged to the roof	hinged to the roof	
	Gutter ope	Gutter opening	

DOOR TYPES

Aluminium steel and standard door: Width 3.20m x height 4.00m maximum (specific sizes are possible)

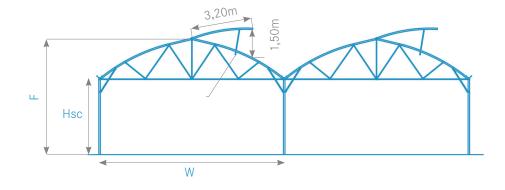



Espace 9.60m

7 Notes

- Wide section poles (90mm x 50mm) made of sendzimir Z 275 galvanised steel tubing: for improved solidity and stability.
- Diagonal rib roof: a perfect fit to reduce condensation.
- Tailored for shaded screen installation.
- An insect-proof system can be installed as standard.
- Structure meets the EN 13 031 European standard.
- Variable stabilisation modes according to climate load.
- Groupama specifications approved.

